


**AD
TEX
SOLUTION**



ALL KINDS OF TEXTILE MACHINERY

**SMARTEC
Rope Dyeing Range**

 **AD TEX SOLUTION**
Spark Power Limited
NETWORK TECHNOLOGY



CORPORATE PROFILE

INTRODUCTION

AD TEX SOLUTION/NETWORK TECHNOLOGY/SPARK POWER LTD/UTD INTERNATIONAL GENERAL TRADING LLC/UPDATE TOUCH LTD are group of limited company for all kinds of Textile Machinery since 2000. Providing Textile & Garments Machinery specially Denim, Woven, Knitting, Composite & Spinning Machinery and all kinds of Spare parts, accessories with maintenance, servicing & technical support. Providing New Factory Consultation and Green Factory Technology.

BUSINESS ACTIVITIES

In textile Industry, the company started activities by supplying all kinds of Smartec Brand Denim Machinery like Rope Dyeing Range, Mercerizing Range, Finishing Range, Sanforizing, G2 Ozone Finishing, G2 Ozone Washing, Singeing, Desizing, Sizing, Stenter, Coating, Lamination, Over Dyeing, Washing, Ball Warping, LCB, Direct Warping, Sectional Warping, Cone Winding Knitting Warping (Re-Coning Machine), Beam Stacker (Auto Micro Computer System), Ware House Racking, Circular Knitting Machine, Fabric Inspection Machine, Auto Roll Packaging Machine, Fabric Folding Machine, Winder Machine, Chemical Mixer Machine, Sample Mini Dyeing Machine, Forklift, Reach Truck, Electric Trolley, Order Picker, Electric Pallet Stacker, Man Lifter, Scissor Lift, Hydraulic Trolley, all kinds of Movable Trolley, Spare parts & accessories.

Providing Textile Chemicals, Raw Cotton Fabrics, Cotton Yarn, Polyester Yarn (DTY/FDY-RW, Black & Color) Polyester ACY Spandex, Creora, Powerfit, Hifit, Spandex, Lycra, Poly Stretch, Cotton Yarn, Spun, Ring (Polyester, Fabrics & Buying House). Supplied Bus Bar Trunking (BBT), ETP, WTP, AC Duct Plantation, Coal Fired Boiler/Coal Fired Plant, Air Compressor, Chiller, Boiler, Over Head Crane (Electrical Hoist), Lab Equipment, Fire Fighting Equipment (Fire Extinguisher), Exhaust Fan, Energy Saving Fan, all kinds of Building materials, Hotel equipment and meat processing machinery.

Industrial Lights, LED Lights, LED T8, T5 Tube Lights, LED High Bay Lights, LED Flood Lights, LED Emergency Lights, LED Panel Lights, LED Spot Lights, LED Boundary Lights, LED Garden Lights, LED Street Lights, Insect Killer Lights, LED Decorated Lights, LED Bulb and Sky Lights.

BUSINESS OPERATION

AD TEX SOLUTION/NETWORK TECHNOLOGY/SPARK POWER LTD/UTD INTERNATIONAL GENERAL TRADING LLC/UPDATE TOUCH LTD located in Bangladesh, China, Dubai (UAE) & India Zone, has been operating over 25 years with best quality product performance as largest supplier of Textile Machinery & technical support in Bangladesh. The performance of product efficiency are excellent and running exported too many countries around the world.

We have an excellent group of high professional experienced Engineers and technical expertise with devoted to ensure 24 hours service & technical support. The major products have been enjoyed to satisfy for customer satisfaction in Bangladesh and abroad with an enviable Image reputation. The company has been enjoyed the largest Textile Machinery market shares in Textile and Garments Industry for Global and domestic markets.

MANAGEMENT

A core of professional management with high of qualified and experienced board of operational management. The board of directors are highly efficient skills & having excellent technical track record. The management systems are very friendly & familiar to make good team spirit, team management & team work.

MAINTENANCE, SERVICE & TECHNICAL SUPPORT

The technical servicing team always ready to provide 24 hours technical service, solution & support to valued customers whenever need to apply prompt services & customer's satisfaction.

MISSION & VISION

The company's mission is to be the best Textile Machinery Supplier around the Textile Industry in Bangladesh and abroad. Make Brand of best quality machinery for customer's satisfaction & make eco friendly, green factory ideology & Consultancy to save environment & next generation world.

Rope Dyeing Range

SMARTEC
Machinery & Engineering Inc. (China)



Major Processing Function

■ Scouring	■ Reactive Bottoming	■ Indigo dyeing + Topping
■ Mercerizing	■ Indigo dyeing	■ Bottoming + Indigo dyeing + Topping
■ Sulfur Bottoming	■ Sulfur topping	
■ Pigment Bottoming	■ Bottoming & Indigo dyeing	

Specification of Machine

■ Number of rope	6 ~ 42 ropes
■ Yarn count	6 ~ 60s
■ Roller width	400 ~ 2,500 mm
■ Machine speed	5 ~ 35 mpm
■ Steamer yarn content	30 Meters
■ Max. Nip pressure	100 KN, adjustable
■ Max. Dancer tension	2 KN, adjustable
■ Oxidation length	40/50/60 meters
■ Chemical circulation rate	2.5 ~ 4 times/hour
■ Max. Ball diameter on creel	1,500 mm

CREEL

- Standard creel stand design with assistant carrier roll to reduce the chance of the rope twist.
- Double-deck creel stand design with assistant carrier roll to reduce the space for special application. (Optional)
- Increase height of the creel frame to reduce the chance of the rope twist.
- Super strong nylon bushing to increase the duration.
- Extra support bars on top of the frame to prevent the slack yarn going into the draw nip.
- Auto tension control adjustment for the creel (Optional).

STEAMER

- Special design for steam generator to ensure steam temperature reaching 1020 C.
- Special design to reduce water leakage at entrance and exit section of steamer.
- Special design of steamer roof to prevent dripping on the ropes inside the steamer.
- Integrated exhaust fan design for customer just need simply to connect to exhaust air duct.
- Easy HMI operation for the steamer control.



DYE BOX & WASH BOX

- Super strong material (SS304/SS316) with surface nanotechnology coating.
- Double-Suction line design to ensure the evenness of the chemical circulation.
- Super strong SS roll design & good quality rubber coating.
- SEW gear box and motor assembly.
- Precisely pneumatic squeezing & compensator tension adjustment.
- Count flow design with pneumatic valve control.
- Elevated design of the top roll (Optional).
- Flute roll design of the top or bottom roll.

CIRCULATON & DOSING

- Modular design of the circulation system, easy for installation & maintenance.
- Modular design of the auto dosing system, real time feedback for precisely control.

OXIDATION STRUCTURE

- Super strong support column for the structure (200 x 200 mm).
- Static spray technology for the MS material coating.
- Special design of the height of the structure to increase the oxidation length of the rope in the air.
- Special design of the catwalk between the dye boxes for easy operation.
- Super polished or Teflon coated sky roll.
- Modular design of the structure for easy installation.



DRY CAN

- SS rotary union.
- Spirax Sarco steam trap.
- Super strong double V belt to drive the cylinders.
- SEW gear box and motor assembly.
- Vacuum valve to prevent damages of the cylinder.
- Energy saving design of the cylinder.

COILER

- Standard design of the gear box.
- Special design of clutch to enable the swing tubes stopped during the lead loop pass.
- Special design of height of the structure to increase the oxidation length of the rope in the air.
- Catwalk on top of the coiler for easy operation & maintainance.



Major Development and Comparison

SMARTEC BRAND Rope Dyeing Range

- Double Suction line and Centering Injection Line.
- Circulation Pipe relocating for better Circulation and Service.
- Nano Coating Technology for Stainless Steel Material Surface Treatment.
- Supper Painting for MS Material for Anti-Acid and Rusting.
- Higher Oxidation Structure for better Color Fastness.
- New Electronics Proportional Value for Auto Dosing Control.
- New Design of the Entrance Tension Control for the Ropes from the Creel.
- Catwalk in between the Dye Boxes for easy Operation.
- Duo-Ethernet Communication Network for Double Safety.
- Automation Control Software Upgrade.
- Centering Injection line for Dye Box.
- Double Suction line for the Circulation Dye Box.
- Higher Oxidation Structure for better Color Fastness.
- Catwalk in between Dye Box for easy Operation.
- Engineering Plastic Catwalk for life time Anti-Rusting.

SMARTEC

Machinery & Engineering Inc. (China)

- Platform cover to all area in the Dry can and Coiler Section.
- Bigger Pumps for Main Indigo Circulation.
- Precise Proportional Valves plus Flow Meter for Auto Dosing.
- Double Deck Creel Stand for Space Saving.
- Duo-Ethernet Communication Network for Double Safety.
- Remote Access or Troubleshooting.
- Special Design of the HMI Operation System.
- Data Recording System for 24 hours History Tracking.
- Quick troubleshooting guide build inside of HMI.
- Spare Parts in stock for long time Warranty and Service.
- Local Service Team for Quick Service.
- Remote Access Service via Internet and Telephone Support.
- Customizing Design of the Machine to meet with the requirement of the Buyer.

Combi Ozone Finishing G2- Washing Range



Main Technical Features

■ Roller Width:	2400
■ Machine speed:	10~60mpm
■ Power supply:	400VAC, 50HZ
■ Installation load:	90KW
■ Utilised Load:	<50KW
■ Steam Pressere:	7 Bar
■ Max. Steam consumption:	<3,000Kg/hour
■ Water pressure:	2~3 Bar
■ Max. Water consumption:	<Max. 20M3/minute
■ Air pressure:	7 Bar
■ Max. Air consumption:	<0.8 M3/Minute
■ All stainless-steel material: (except the box #9 and the stam entrance and exit)	SS304
■ Stainless-steel material of the box #9 and the steam entrance and exit:	SS316
■ Rubber roller coating:	Good quality
■ Brand of flow meter:	Krohne
■ Brand of gear box and motor for paddar:	SEW
■ Brand of inverter:	Allen Bradley
■ Brand of PLC:	Allen Bradley
■ Machine color:	RAL7046

Over Dyeing & Desizing Machine



Main Technical Features

Desizing is the process of removing the size material from the Warp yarns in Woven fabrics. Sizing agents are selected on the basis of type of fabric, environmental friendliness, ease of removal, cost considerations, effluent treatment etc.

Desizing, irrespective of what the desizing agent is, involves impregnation of the fabric with the desizing agent, allowing the desizing agent to degrade or solubilise the size material, and finally to wash out the degradation products.

Desizing Process

The major desizing processes are:

- Enzymatic desizing of starches on cotton fabrics.
- Oxidative desizing.
- Acid desizing.
- Removal of water soluble sizes.

Ball Warping Machine



Main Technical Parameters

Width	1000 - 1200mm	
Ball Dia	≤ 1400mm	
Speed	10~350m/min	
Pressing Force	1500N~5500N	
Pressing Form	Regulating valve, manually control	Standard
	Proportioning valve, automatically control	For option
Feeding Form	Common motor	Standard
	Servo motor (warp ball edge reducing)	For option
Power of main motor	5.5Kw	
Machine weight	1500Kg	
Overall dimension	2300mm x 1550mm x 1720mm	
Pressurize by Cylinder + Synchronous Gear Rack		
Servo Drive, Ball can be edged Automatically		
Vacuum Device		

Re-Beaming LCB Machine



Main Technical Parameters

Working width	1600mm, 1650mm, 1800mm, 2000mm	For option
Beaming dia.	φ800mm, φ1000mm	For both
Warping speed	0~350m/min	
Brake distance	≤ 1.5m	
Winding density	0.55~065cm ³	
Expansion reed	W, 0~20mm, W-shaped, swing left and right, interlock working with warping beam, swing scope 0~20mm	
Main motor power	15Kw, 15Kw inverter motor	
Yarn store capacity	Turn around stand(up and down): <12m	For both
	Upper stand: Full barrel store	For option
Machine weight	3500Kg	
Overall dimension	1600mm 3837mm(L) x 1950mm(W) x 2600mm(H)	
	1800mm 4037mm(L) x 1950mm(W) x 2600mm(H)	
	1600mm 3837mm(L) x 1950mm(W) x 2600mm(H)	
Buffing Device, Tension Frame, Upper Reversing		

Direct Warping Machine



Product Description

H-fang Direct Warping machine is a weaving preparatory machine, as a support facility for various brand sizing machines.


Product Feature

With the continuous improvement of dyeing & finishing technology as well as wash and wear technology, cotton fabric and fallow garment from a trend of fashion, on the basis, our company successfully developed the HFGA128 Intelligent Direct Warping Machine, which is the first of its kind in China, as a support facility for name brand sizing machines both at home and abroad.

Main Technical Features

Max.speed	1200m/min
Inching speed	<20m/min
Max.tension	450m
Max.braking torque	16000Nm
Motor power	15Kw
Work width (mm)	1400, 1600, 1800, 2000, 2200 (for option)

Sectional Warping Machine

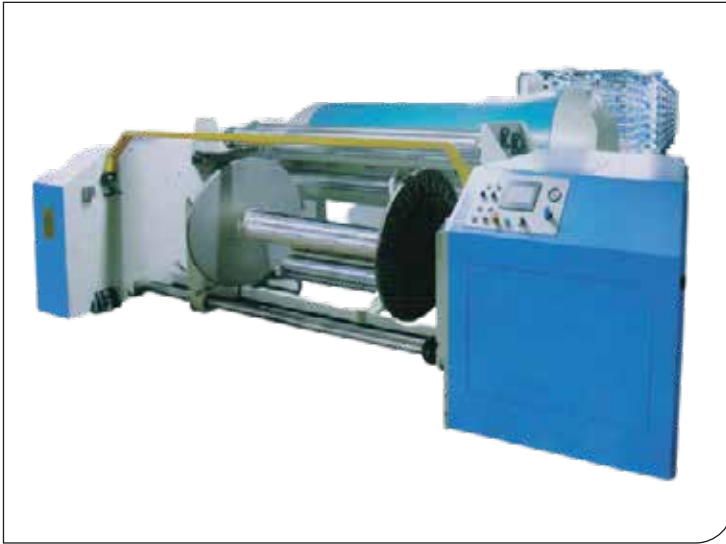

Main Technical Parameters:

■ Beam diameter	φ800, φ1000
■ Working width	2300~5600
■ Drum taper	1:6, 1:8
■ Drum taper length	1150(φ800); 1380(φ1000,1:6); 1840(φ1000,1:8)
■ Max.beaming tension	6000N
■ Max.section width	770mm
■ Max.working speed	500m/min
■ Max.beaming speed	150m/min(full beam)
■ Tension measurement device	No
■ Density measurement device	No
■ Warping infrared protection	No
■ Load/unload control	Pneumatic
■ Beaming tension control	Pressure regulating valve
■ Tension frame control	Open-loop control

Cone Winding Knitting Warping Machine



Technical Parameters

■ Suitable yarn number	18 - 98tex.
■ Warp beam available breadth	1600mm 1800mm.
■ Disk sheet diameter of warp beam	800mm 1000mm.
■ Speed of making cylinders	0 ~130m/min.
■ Length of making cylinders 20S yarn	3500 meters
■ Number of head in making cylinders	400 - 480 (user defined).
■ Operation monitor	5.5" touch screen.
■ Input voltage	3 x 380V + 10%.
■ Installed capacity	3servo motors, 3KM of each.
■ Complete appliance weight	7000Kg.
■ End Break Detecting:	Infer-Red Stop Motion Sensor.
■ Count of the yarn:	7S ~ 40S
■ Tension :	30 ~ 50g/end.
■ Cone size :	078mm x L100mm.

Beam Stacker



Main Technical features

- Professional and High-Level design team, designing as per customer's site, more practical and economical.
- Adopt German advanced technology, easy operation, improve work efficiency.
- Synchronous motor drive, improves storage capacity, stress uniform & ensure service life.
- Variable frequency speed control, reduce inertia, stable running.
- Use high quality steel as structure material, sturdy and durable.
- Surface Spraying plastics treatment to protect rusting, nice and Environment-friendly.
- Guard bar design and touch sensor, humanization and safety netting guard.
- New type hydraulic lift platform, stabilize and easy operate.
- Customized chain sturdy and durable.
- Best out looking, smooth finishing and finest colorful environment friendly machine.

Sizing Machine



With the help of Servo Motor control technology, the seven Motors are synchronously controlled by the PLC and the Servo Drives, the high accuracy control system to ensure the sheet stretch rate being well controlled, even during the acceleration and deceleration period.

Singeing Machine



The open-width cloth entry frame is made of steel plate by bending. It is equipped with infrared photoelectric centering device. Brushing box : The Singeing consists of 3 burners. Two are for surface side, one for back side. So as to meet the process requirement of Denim. The flame temperature of the burner is 1200°C.

Sanforizing Machine



Technical Specification
 Roller Width : 1800 - 3200mm
 Shrinkage Range : 0 - 16%
 Machine Speed : 5 - 100m/min
 Installation Power : About 49KW (Standard)
 Dimension : 20130 x (W + 1880) x 3800 (Standard)

Sample Mini Dyeing Machine



SAMPLE MINI DYEING MACHINE, which originated in china, Typing equipment suitable for dyeing effect of yarn dyed yarn. It is a laboratory equipment for concentrating research and development of the production process of the combined machine (vertical dyeing and dyeing) at home and abroad. Full machine manufacturing is beautiful and practical, and all of them are made of SUS304 stainless steel. The function is complete and the use is convenient.

Machine characteristics and configuration
 1. The yarn is controlled by the heating temperature, Through rolling and rectifying.
 2. Dyeing tank: Maximum capacity of 8 liters.
 3. Padder : High-precision NBR for roller.

Fabric Inspection Machine



Fabric Folding Machine



Semi Auto Packaging Machine



Fully Automatic Packaging Machine




Chemical Mixer Machine




Mixer Specification : 500L8* Φ 900
 Material of Mixer Tank : 304 SS Stainless Steel
 Thickness of Mixer Tank : 3mm
 Capacity : Full Volume : 528L
 Effective Volume : 400L
 High Speed Disperse Motor : Power 11KW 380v/50Hz
 Disperse Speed : 0 - 1500rpm
 Scraper Speed : 30rpm
 Mixing Speed : 30rpm
 Low speed Scrape Motor : Power 4KW 380v/50Hz
 Motor Brand : Hongyang Electrical (China)
 Inverter Power and Brand : 11KW SAJ
 Guangzhou (China)
 Lifting Control : Hydraulic Control

Circular Knitting Machine

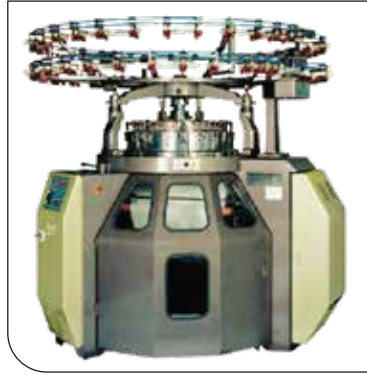

Circular Knitting Machine is widely used through out the knitting industry to produce fabric. This Machine can be built in almost any reasonable diameter and the small diameter of up to five, which are used for wear.

Winder Machine & Weaving Machine

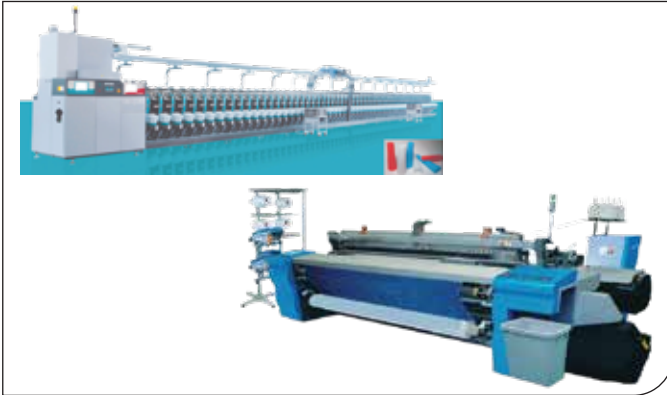

Ware House Racking



Energy Saving Boiler & Coal Fired Boiler



AC Duct Plantation & Chiller Plant



Bus Bar Tranking (BBT)



BBT

Water Treatment Plant (WTP) & Effluent Treatment Plant (ETP)



WTP

ETP

ALL KINDS OF MOVABLE TROLLEY & MATERIAL HANDLING

More than 430 type lift trucks with capacity from 500Kg to 5000Kg

Hand Pallet Truck	Electric Pallet Truck	Stacker	Order Picker	Reach Truck	Forklift Truck
 <p>Hand Pallet Truck Heavy Duty Cap : 1000-3000kg</p> <ul style="list-style-type: none"> ✓ Move Smoothly ✓ One Key Operation ✓ Battery Power  <p>Mini Lift Pallet Cap : 550kg Lift Height : 1.5m</p>  <p>High Lift Pallet Truck Model : JF Cap : 1000kg</p>  <p>Manual Stacker Model : SDJ500/SDJ00/SDJ1500 Cap : 500kg, 1000kg, 1500kg Lift height : 1m ~ 3m</p>	 <p>Electric Pallet Truck Model : PTE20B Cap : 2000Kg</p>  <p>Electric Pallet Truck Model : CBD20K (D) Cap : 2000kg</p>  <p>Electric Pallet Truck (Option EPS) Model : CBD20R - I/CBD20R - II/ CBD25R Cap : 2000kg, 2500kg</p>  <p>Double Decker Pallet Truck Model : CBD20SR Lift Height : 3m Cap : 2000kg</p>  <p>Electric Pallet Truck (EPS) Model : CBD25T/CBD30T Cap : 2500kg ~ 3000kg</p>	 <p>Electric Stacker Model : PS13/15RN Plus Cap : 1000 ~ 1500kg Lift height : 1.2m ~ 4.8m</p>  <p>Economic Ride-On Electric Stacker Model : PSE 15-C Cap : 1500kg</p>  <p>Laser Navigation Stacker Model : CDD15K/20K (AGV) Cap : 1500kg ~ 2000kg Height : 3.3m</p>  <p>Platform Stacker Manual/Electric Model : EPS0412/EP50415 Cap : 400kg</p>  <p>Electric Reach Stacker (Option EPS) Model : CQDH12A/CQDH15A/CQDH20A Cap : 1200kg, 1500kg, 2000kg Lift height : 2.5m ~ 6m</p>  <p>Electric Reach Truck Compact & Smart Model : TE10 Cap : 1000kg</p>  <p>Drum Stacker Cap : 250 - 800 Kg</p>	 <p>OPX15 Very Narrow Aisle (VNA) Reach Truck Model : OPX15 Cap : 1500kg Lift height : 5m - 9.5m</p>  <p>Order Picker (Semi-Electric/Full Electric) Model : STD/SDD Cap : 400kg Lift height : 3.5m ~ 4.5m</p>  <p>Electric Tow Tractor Model : QDD20/QDD30/QDD50/ QDD60/QDD1000 Cap : 2000kg ~ 10000kg</p>  <p>Electric Truck with Crane Model : DC500 Cap : 2000kg</p>  <p>Forklift/Scrubber Model : NB530/NR530</p>  <p>Pedestrian Tow Tractor Model : QDD25W Cap : 2500kg</p>	 <p>Electric Reach Truck Model : CQD20/CQD20H Cap : 2000kg Lift height : 3m ~ 7.4m, 8m ~ 12m</p>  <p>Electric Reach Truck Model : RT 16/20 Pro Cap : 1600/2000kg</p>  <p>Narrow Aisle Lift Truck Model : CDDRM - 05/CDDRM - 10 Cap : 500kg, 1000kg Lift height : 3.3m</p>  <p>Electric Lateral Reach Truck Model : OPD15 Cap : 1500kg Lift height : 5m ~ 9.5m</p>  <p>Narrow Aisle Forklift Truck (Option EPS) Model : CPD10A/CPD10B Cap : 1000kg Lift height : 3 ~ 5m</p>  <p>Fork Reach Truck Model : CQDH15C Cap : 1500kg Lift height : 3m ~ 6m</p>	 <p>Three Wheel Rear Drive Electric Forklift Truck Model : FE3R16N Cap : 1600kg</p>  <p>Four Wheel Electric Forklift Truck Model : FB16/FB18/FB20 Cap : 1600kg, 1800kg, 2000kg Lift height : 3m ~ 6m</p>  <p>4 Wheel Li-Iron Electric Forklift Truck Model : FE4P30Q-LI/FE4P35Q-LI Cap : 3000/3500kg</p>  <p>Gasoline & Dual Fuel Forklift Truck Model : FG15/FG20/FG25/FG30/FG35 FGY15/FGY20/FGY25/FGY30/FGY35 Cap : 1500kg ~ 3500kg Lift height : 3m ~ 6m</p>  <p>Explosion-Proof Electric Forklift Truck Model : CPD15Ex/CPD20Ex /CPD30Ex/CPD35Ex Cap : 1500kg, 2000kg, 3000kg, 3500kg Lift height : 3m ~ 5m Cert No : CNEX08.1896 Mark Exd mbs II BT4 Gb/DIP A21 TA.T4</p>  <p>Diesel Forklift Cap : 5000kg</p>
<p>Beam Carring Trolley</p>  <p>Hydraulic Unloaded Beam Conveyor</p>  <p>Hydraulic Fully Loaded Conveyor</p>  <p>Hydraulic Tipping Beam Conveyor</p>	 <p>Hydraulic Elevating Plaiter</p>  <p>Hydraulic Beaming Vehicle with Frame</p>				

All KINDS OF MOVABLE TROLLEY & MATERIAL HANDLING

More than 430 type lift trucks with capacity from 500Kg to 5000Kg

Stationary Lift Table




Stationary Lift Table
Model : AL1/AL2
Cap : 1000kg ~ 2700kg

Spider Lift



Load Capacity : 200kg ~ 350kg
Working Height : 8m ~ 56m
Rotation : 360

Mobile Container Loading Ramp

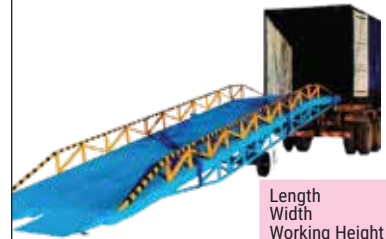

Length : 11m
Width : 2.08m
Working Height : 1 - 1.8m
Capacity : 5 - 15t

Electric Scissor Lift



Lifting Height : 4m ~ 18m
Load Capacity : 200kg ~ 500kg

Diesel-Powered Articulated Boom Lift



Load Capacity : 230kg
Working Radius : 8000mm
Lifting Height : 14000mm

Stationary Hydraulic Dock Ramp



Loading Capacity : 12000kg
Lifting Height : +0.4/-0.3m
Overall Dimension : 2 x 2 x 0.6m

Mast Lift



Lifting Height : 4m ~ 18m
Load Capacity : 200kg ~ 500kg

Boom Truck Lift



Load Capacity : 200kg
Working Height : 24000mm
Working Radius : 12000mm

Mobile Work Platform & Cargo Scissor Lift



Diesel Power Scissor Lift



Lifting Height : 10m ~ 18m
Load Capacity : 300kg ~ 1150kg

Height Aerial Lift



Load Capacity : 200kg
Lifting Height : 10500mm
Power : Diesel

Trailer Scissor Lift



Load Capacity : 300kg
Platform Size : 1650 x 800mm
Travel : 6000mm

Cargo Lift

Cargo Lift with Full Mesh

Two Post Cargo Lift



Heavy Duty Loading Ramp



Load Capacity : 15000kg
Lifting Height : 1000 - 1800mm
Platform Size : 11000 x 2000mm

Golf Car & Car Lift



Four Post Car Lift

ALL KINDS OF SPARE PARTS

Rubber Roller



Inverter Allen Bradley (USA) & Proportional Valve




Over Head Crane (Electrical Hoist)



AC Servo Motor & E.L.O Motor



Powerflex Bus Supply & PLC Module

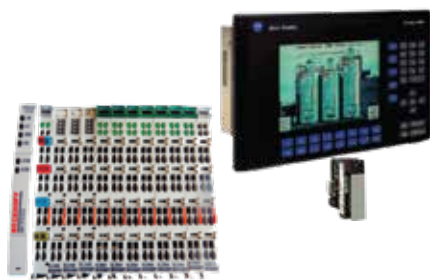

Fabric Counter Meter & Beam



Gear Box & Industrial Air Cooling System



Different Kind of Bearing



Comb Reed & Magnetic Warning Belt



Conveyor Belt



Automatic Rolling Door & Automatic Fence Gate



Truck Weight Scale Machine



Bobin for Spinning Machine




Raw Cotton Fibers



Cotton/Polyester (DTY/FDY) Yarn



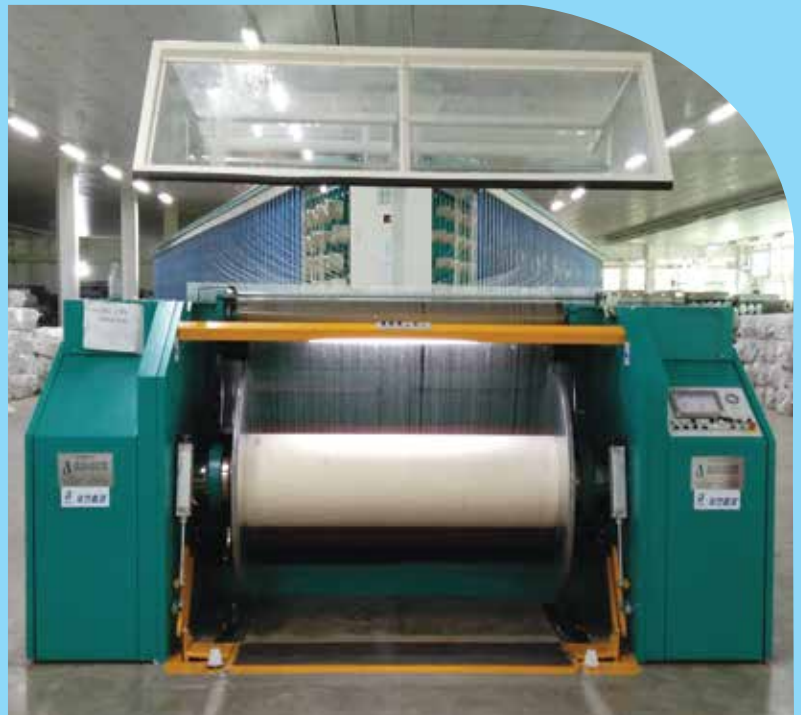

Bangladesh Office

Head Office :
16/9 Azam Road (1st Floor)
Mohammadpur, Dhaka- 1207, Bangladesh.
Phone : +88 02 481 192 08
E-mail : info@update-adtex.com
shahid.nettec04@gmail.com
mdjahid0050@yahoo.com

China Office

Guangzhou Branch :
Room 300, Block B, Lianming Business
Center, No. 20 Songbai East Street,
Baiyun District, Guangzhou,
Guangdong, China

India Office

A-315, Titanium Business Park,
Near Underbridge, Makarba,
Ahmedabad- 380051, Gujarat, India

Corporate Office

Plot No. 53, Road No. 2, Block-B
Green City Housing, Basila, Mohammadpur,
Dhaka-1207, Bangladesh

Dubai Office

Office No. 01, Plot No. 54,
Almehri Building, Ras Al Khor
Industrial Area, Dubai, UAE

